


INSTALLATION & MAINTENANCE MANUAL  
VML1

---

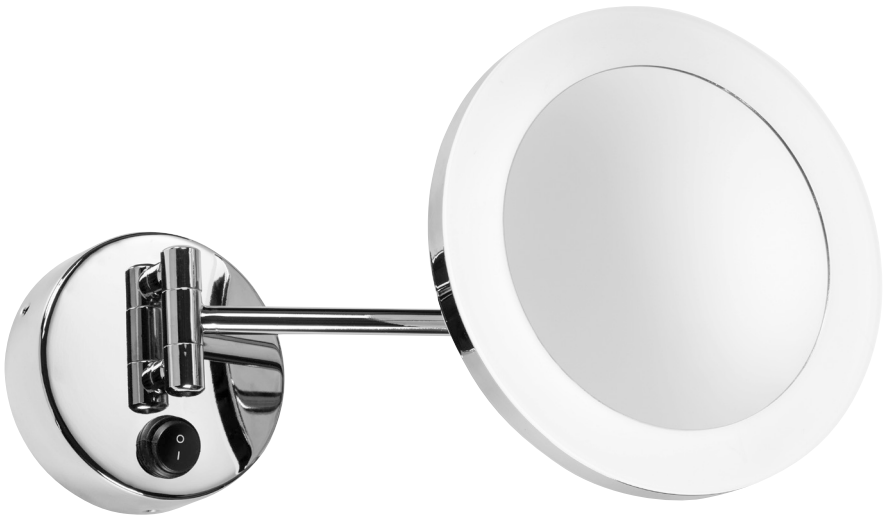

## GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following product:


VML1

## SAFETY

- Installation of this product should only be carried out by a qualified electrician or competent person to the current Building and IEE Wiring Regulations (BS7671)
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress of Protection) rating of this luminaire when deciding the location for installation
- This product is Class II double insulated
- This product is IP44 rated
- This product is non-dimmable


## INSTALLATION

- Provide power to the point of installation. Suitable IP rated junction boxes should be used where required
- Remove the base plate by removing the 3 Allen screws (see Fig 1)

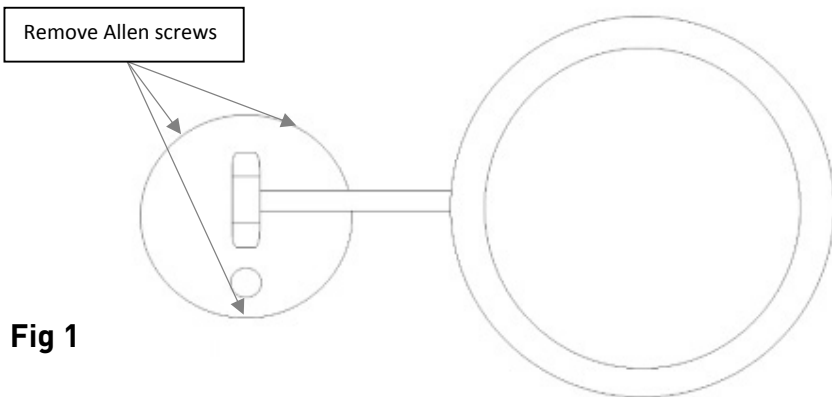

**Fig 1**

- Mark the location of the fixing holes, and drill the holes ensuring not to infringe with any joists, gas/water pipes or electrical cables
- Feed the cable via the grommet on base plate, and secure base plate to surface
- Connect Live (brown), Neutral (blue) to the 2-way terminal block (see Fig 2)

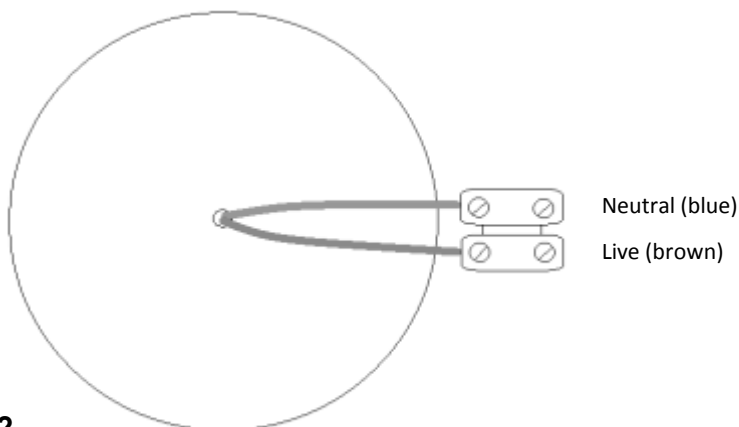

**Fig 2**

- Secure fitting to base plate and fasten the 3 Allen screws
- Switch on power and test for correct operation

## **WARNING**

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed. Do not use any source of high pressure washers to maintain or clean this product.

## **GENERAL**

The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the fitting.

## **WARRANTY**

This product has a warranty of 3 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

# Knightsbridge<sup>®</sup>

the mark of quality