

INSTALLATION & MAINTENANCE MANUAL  
**SLUED**

---



## GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following product:

SLULED

## SAFETY

- Installation of this luminaire should only be carried out by a qualified electrician or competent person to the current Building and IEE Wiring Regulations (BS7671)
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress of Protection) rating of this luminaire when deciding the location for installation
- This product is Class I and requires an earth
- This product is IP44 rated

## INSTALLATION

- Provide power to the point of installation. Suitable IP rated junction boxes should be used where required
- Using the back plate as a template, mark the location of the fixing holes and drill the holes ensuring not to infringe with any gas / water pipes or electrical cables (see Fig 1)


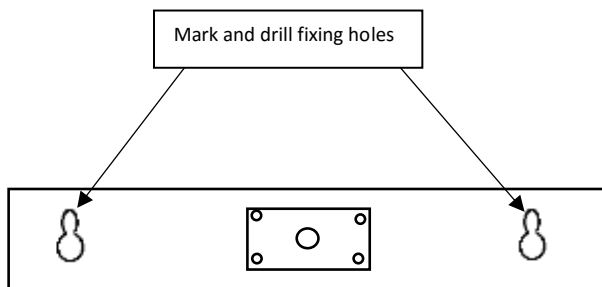



Fig 1

- Insert wall plugs and screws into the 2 drilled holes.
- Remove the 4 screws on the terminal cover plate and feed cable through the cable entry grommet (see Fig 2)

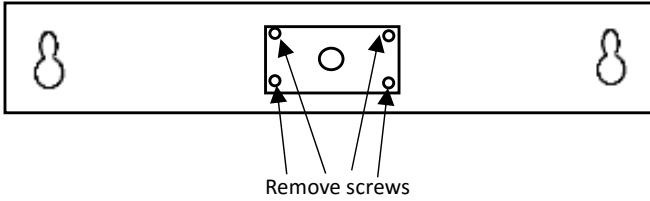

**Fig 2**

- Connect the Live (brown), Neutral (blue) and Earth (yellow and green) via the three-way terminal connector (see Fig 3)

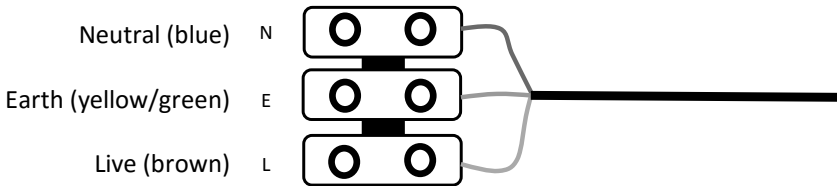

**Fig 3**

- Refit the terminal cover onto the fitting and fasten the 4 screws
- Carefully position fitting onto the screws in the wall
- Switch on the power supply and check for correct operation
- Please note the pull cord is for light operation only. Shaver and USB socket remain permanently live

## WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

**Maximum shelf weight 2kg**

## GENERAL

The product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

## WARRANTY

This product has a warranty of 3 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.



**ML Accessories Limited**

**LU5 5TA**

**[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)**

**SBJUN17\_V1**