

INSTALLATION & MAINTENANCE MANUAL

SLIGHT2



GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following product:


SLIGHT2

SAFETY

- Installation of this luminaire should only be carried out by a qualified electrician or competent person to the latest Building and current IEE Wiring Regulations (BS7671)
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this load is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress of Protection) rating of this product when deciding the location for installation
- This product is IP20 rated
- This product is Class II double insulated
- This product is non-dimmable
- This product will not operate whilst the diffuser is removed

INSTALLATION

- Provide power to the required point of installation
- Remove the diffuser by gently squeezing inwards top and bottom at both ends then pull away from the fitting (see Fig 1)

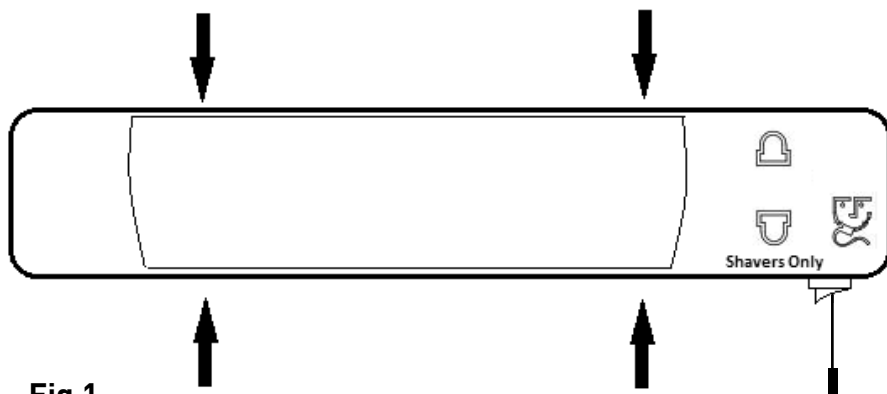

- Remove the LED tube by pushing it in at one end and gently pulling out of the lamp holders
- Using the fitting as a template, mark the location of the fixing holes and drill the holes ensuring not to infringe with any gas/water pipes or electrical cables
- Remove the two screws at the rear of the fitting and remove the access plate to expose the terminal block (see Fig 2)

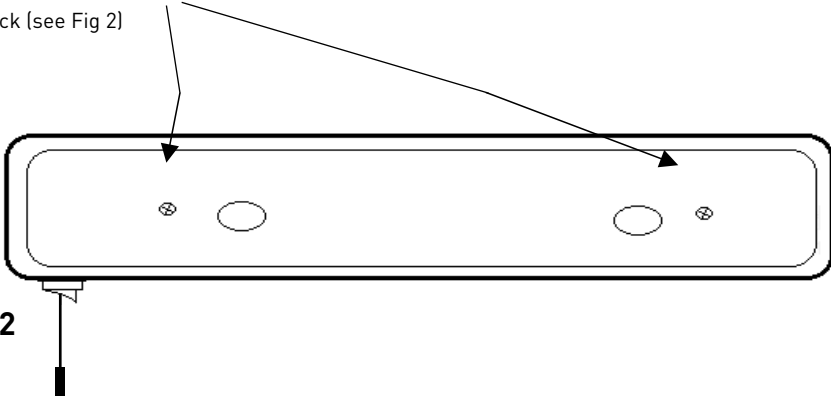


Fig 2

- Feed the cable through the rear of the access plate and ensuring correct polarity is observed carefully wire as shown in Fig 3

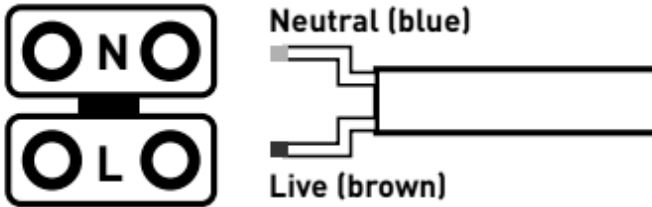


Fig 3

- Replace the access plate and screws
- Align the fitting with the previously drilled holes and attach to the surface using the screws and wall plugs provided
- Carefully insert the LED tube back into the lamp holders and replace the diffuser
- Switch on power supply and check for correct operation

WARNING

The lamp in this product must be disconnected from the circuit if it subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

The product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.



ML Accessories Limited
LU5 5TA
www.mlaccessories.co.uk

SBJUL18_V1