



## **ASR2LED/B**

Sorrento 2 LED 8W Black



## **Features**

Shallow depth IP65 polycarbonate 2-In-1 LED bulkhead for external applications.

Supplied with both plain and louvred eyelid covers.

Exceeds performance of 18W PLC.

LED lifespan L70 56,000 hours.

Non-dimmable.

## General Information


|                                |          |
|--------------------------------|----------|
| Lamp Type                      | LED      |
| Colour / Finish                | Black    |
| IP Rating                      | IP65     |
| Class Protection               | 2        |
| Internal / External            | External |
| Surface / Recessed / Suspended | Surface  |
| Warranty (Years)               | 2        |
| CE Mark                        | Yes      |
| Width (mm)                     | 333.9    |
| Height (mm)                    | 181.8    |
| Depth (mm)                     | 85.1     |

## Technical Information

|                  |             |
|------------------|-------------|
| Wattage          | 8W          |
| Lumens Delivered | 634lm       |
| Lm/W             | 79lm        |
| CRI              | Ra 80       |
| CCT              | 4000K       |
| Input            | 230V        |
| Hertz            | 50/60Hz     |
| Operating Temp   | 0°C to 25°C |

## Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

|  |             |
|--|-------------|
| Suitable for wall mounting             | Yes         |
| Suitable for suspended mounting        | No          |
| Suitable for ceiling mounting          | Yes         |
| Suitable for built-in mounting         | No          |
| Suitable for surface mounting          | Yes         |
| Suitable for number of lamps           | 1           |
| Material housing                       | Plastic     |
| Colour housing                         | Black       |
| Nominal voltage                        | 230-230 V   |
| Control gear included                  | Yes         |
| No dim function                        | Yes         |
| Degree of protection (IP)              | IP65        |
| Protection class                       | II          |
| Suitable for emergency lighting        | No          |
| With movement sensor                   | No          |
| With light sensor                      | No          |
| Max. system power                      | 8 W         |
| Rated luminous flux acc. IEC 62722-2-1 | 634 lm      |
| Colour of light                        | White       |
| Colour temperature                     | 4000-4000 K |
| Colour rendering index CRI             | 80-89       |
| Luminaire efficacy                     | 79 lm/W     |
| Width                                  | 85.1 mm     |
| Height/depth                           | 181.8 mm    |
| Length                                 | 333.9 mm    |

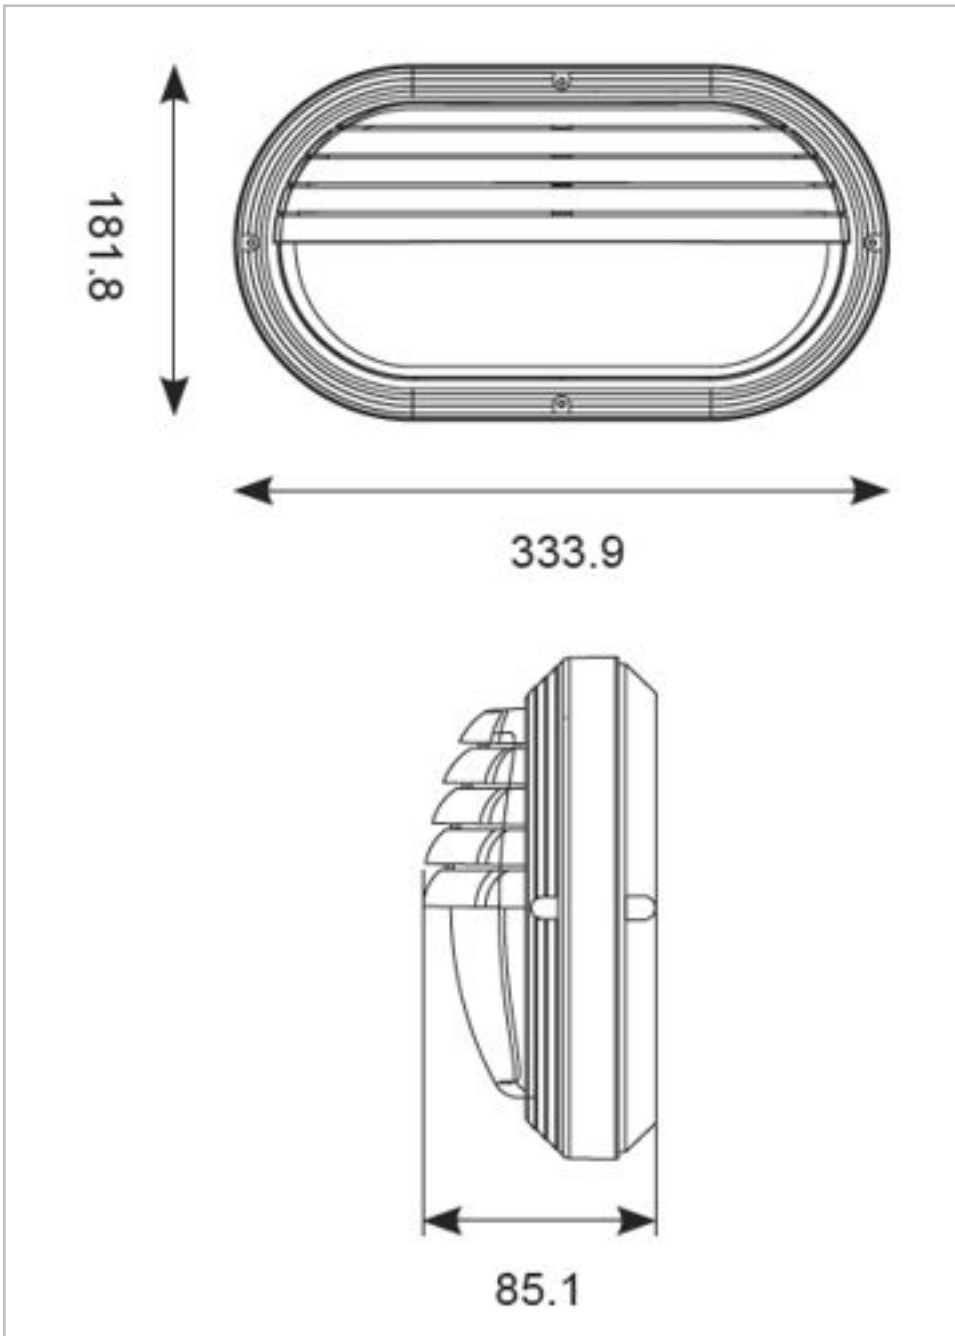

Datasheet generated from <https://onetimepim.com> last updated Monday, November 4, 2019 2:20:20 PM