

ASR2LED/W Sorrento 2 LED 8W White



Features

Shallow depth IP65 polycarbonate 2-In-1 LED bulkhead for external applications.

Supplied with both plain and louvred eyelid covers.

Exceeds performance of 18W PLC.

LED lifespan L70 56,000 hours.

Non-dimmable.



General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP65
Class Protection	2
Internal / External	External
Surface / Recessed / Suspended	Surface
Warranty (Years)	2
CE Mark	Yes
Width (mm)	333.9
Height (mm)	181.8
Depth (mm)	85.1

Technical Information


Wattage8WLumens Delivered634ImLm/W79ImCRIRa 80CCT4000KInput230VHertz50/60HzOperating Temp0°C to 25°C		
Lm/W 79lm CRI Ra 80 CCT 4000K Input 230V Hertz 50/60Hz	ttage 8W	
CRI Ra 80 CCT 4000K Input 230V Hertz 50/60Hz	mens Delivered 634	lm
CCT 4000K Input 230V Hertz 50/60Hz	/₩ 79lr	n
Input 230V Hertz 50/60Hz	I Rat	80
Hertz 50/60Hz	T 400	0К
Hertz 50/60Hz		V
Operating Temp 0°C to 25°C		50Hz
	erating Temp 0°C	to 25°C



Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
Suitable for number of lamps	1
Material housing	Plastic
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Degree of protection (IP)	IP65
Protection class	11
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	8 W
Rated luminous flux acc. IEC 62722-2-1	634 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Luminaire efficacy	79 lm/W
Width	85.1 mm
Height/depth	181.8 mm
Length	333.9 mm



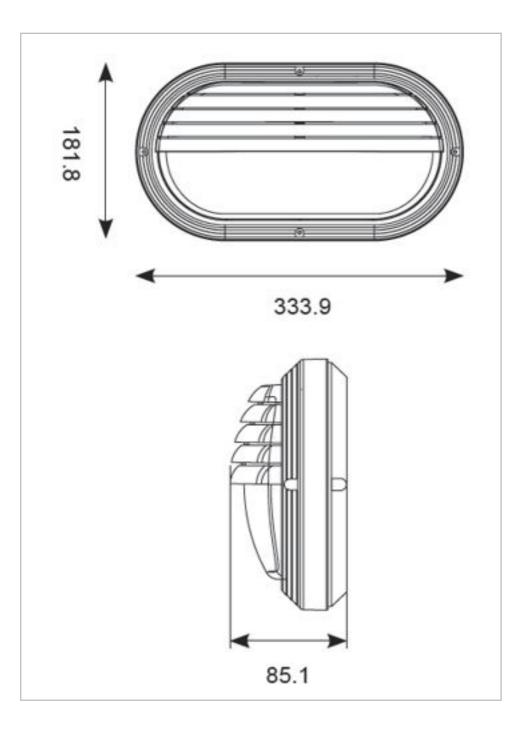

Datasheet generated from https://onetimepim.com last updated Monday, November 4, 2019 2:20:22 PM

