



KPWL03POC54

LED rechargeable portable pocket work light, 3W ,6500K



Product Overview

The Kosnic Rechargeable LED Portable Pocket Light may be use outdoors on work sites but is equally useful inside the home when a temporary light source is required. The 3W Pocket Light includes a high capacity lithium-ion battery allowing the light to work continuously for 3 hours at the highest output and 8 hours at a reduced level. The Pocket Light includes an integrated magnetic stand and suspension hook.

Features

High 300 lumen output

Class III, IP54

USB charging lead (charger not supplied)

Charging indicator

High and low output modes

Integrated magnetic stand and suspension hook

High impact ABS housing (IK07)

Polycarbonate lens

Instant start.

Negligible UV output

Mercury free

Unit D2 Kennetside, Bone Lane

Newbury, Berkshire

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>



Specifications

Colour Finish	Yellow/Black
Power (W)	3
Current (mA)	811
Voltage	3.7 Vdc
CCT Temperature (k)	6500
CCT Name	Day Light
Rated Lifetime (hrs)	40000
Switch Cycles	20000
Beam Angle (°)	90 x 110
CRI	81
Dimmable	Yes (high/low)
IP Rating	IP54
Class Protection	Class III
IK Rating	IK07
Warm-up Time (s)	Instant full light
Width (mm)	66
Height (mm)	126
Depth (mm)	30
Weight (kg)	0.12
Mercury (mg)	0
Rated Luminous Flux (lm)	300 (high) 110 (low)
LMF at Lifetime	0.75
Ambient Temperature (°C)	-10 to 40
Operating Modes	3 hours (high) 8 hours (low)
Battery Voltage (V)	3.7


Unit D2 Kennetside, Bone Lane
Newbury, Berkshire

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>

Battery Capacity (mAh)	1500
Battery Type	Lithium-Ion
USB Charging Input Voltage	5 Vdc
Charging Time (hrs)	3 (at 1.0A)

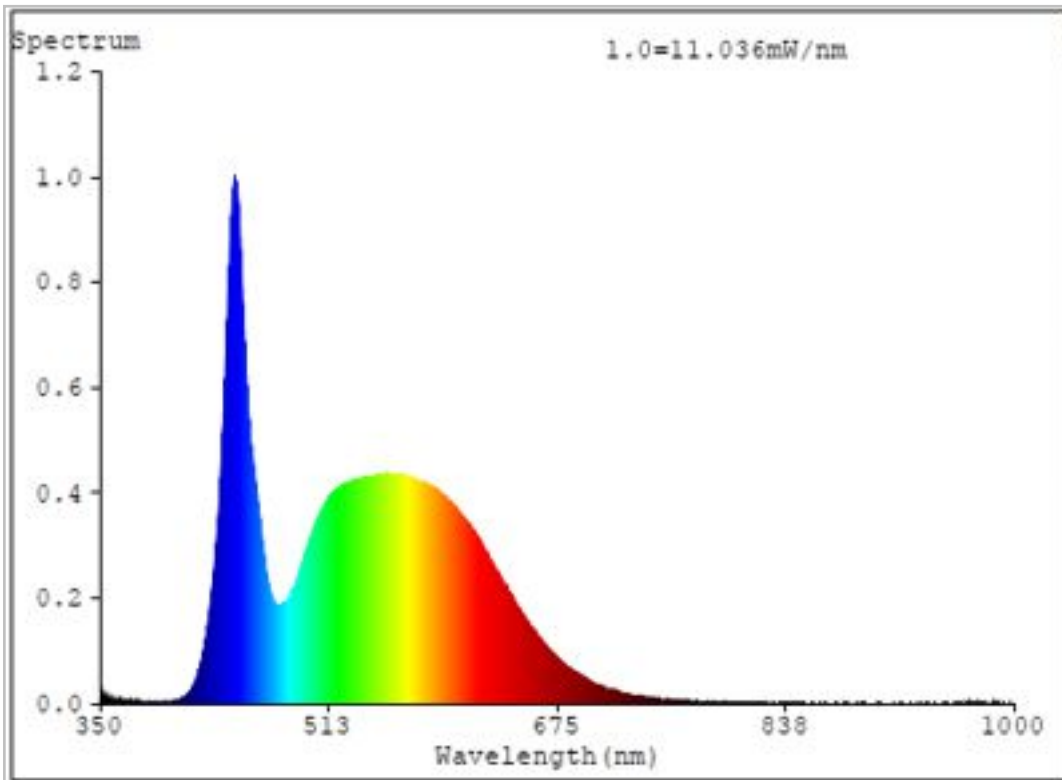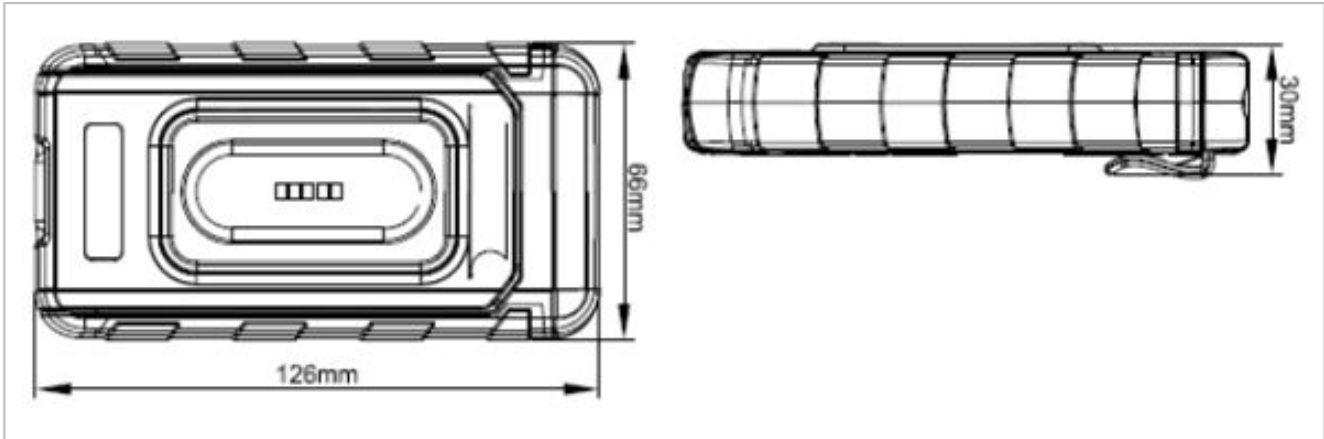


Datasheet generated from <https://www.electrika.com> last updated Friday, April 26, 2019 11:20:44 AM

 This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Kosnic (Product Code)

874/2012



A++
A+
A
B
C
D
E

LED

