
# Evofire 70mm cutout Fire Rated Static Downlight Round Satin Nickel with Insulation Guard and GU10 Holder

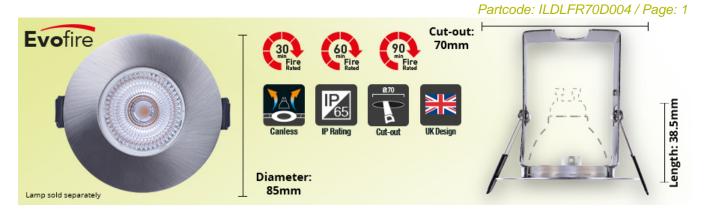

The Evofire Fire Rated Downlight is a safe and attractive fitting for a GU10 or MR16 LED lamp. The fully open design of the Evofire does not conceal your lamp in a large metal canister, which can trap some of the heat it generates, lowering lamp lifetime and performance. Lamps installed in an Evofire run at up to 10 degrees C cooler than a typical can-style fire rated downlight from leading LED brands - this can extend the lifetime of your lamps.

As well being very tough thanks to its steel construction, The Evofire is also a highly aesthetic choice for Fire Rated lighting. The 1mm blend-in bezel is up to 10 times thinner than typical IP65 rated downlights and fits almost flush with your ceiling, so the downlight looks discreet and pleasing in any setting. The satin nickel finish on this model looks stylish and contemporary.

This downlight is fire rated to 30, 60 and 90 minutes in compliance with BS476 Part 21:1987, Air Tightness compliant with Part C and Part L and Resistance to Sound compliant with Part E. See installation guide for full details.

#### Watch Video

Evofire shown with Real Colour GU10 LED lamp (sold separately).

# **Product Details**

Partcode: ILDLFR70D004 Check Code: 136879 Range Name: EVOFIRE Placement / Application: Indoor, General Lighting Market Segment: Commercial indoor, Residential indoor Product Type: Fire Rated Warranty: 3 Years CE / RoHS: Yes

### **Physical Data**

Product Finish: Satin Nickel Material: Steel, Glass Construction: Pressed Steel, Glass

### www.integral-led.com



# www.integral-led.com

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE

Partcode: ILDLFR70D004 / Page: 2

# **Physical Data**

Depth: 83mm Diameter: 85mm Weight (Unpackaged Single Unit): 173g Cut Out Diameter: 70mm Lamp or Luminaire Shape: Round Luminaire Fixing: Recess mounted Fire Rating: 30, 60, 90

## **Electrical Data**

# integral LED

Partcode: ILDLFR70D004 / Page: 3

### **Environmental**

IP (Ingress Protection) Rating: IP65 IP Rating (Back/Recessed side): IP20

## Packaging

EAN Barcode (unit of 1): 5055788228509

Packaged Weight (Unit of 1): 188g

Length (unit of 1): 90mm

Width (unit of 1): 90mm

Depth (unit of 1): 115mm

Outer packaging info available on website

Product data last updated on: Wednesday, August 28, 2019 - 11:49