
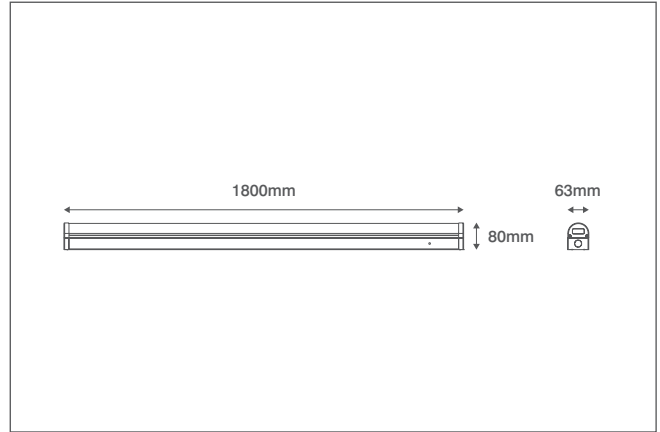


INCEPTOR® B-LITE

Technical Specification

Product Code: OV82180MW

Description: 50-75W 1800mm Linear Batten Multi-Current LED Light - Microwave Sensor

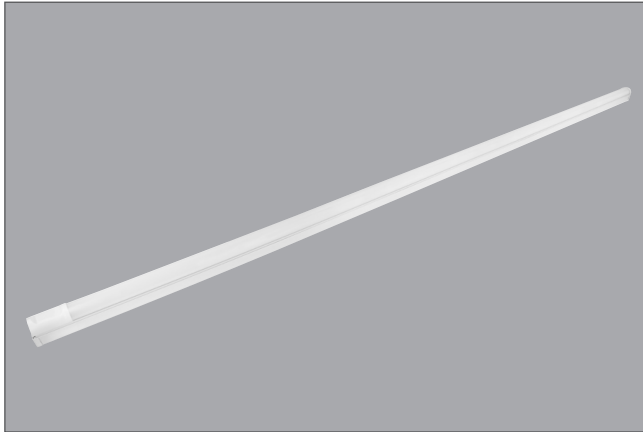

General Information

Dimensions	1800mm (L) x 63mm (W) x 80mm (D)
Materials	Base: Powdercoated Steel Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9010)
Product Weight	2Kg
Dimmable	No
Ingress Protection	IP20
Flammability Rating	TP(a)
Warranty	5 Years

Supply & Power


Input Voltage & Frequency	220-240V ~ 50Hz
Electrical Safety	Class II (Double Insulated)
LED Wattage	50W/58W/64W/70W
Circuit Wattage	50W/58W/64W/70W
Input Current	360mA
Inrush Current	0.36A (<0.5S)
Power Factor	>0.9
Ambient Temperature (Ta)	-20°C - +45°C
Critical Temperature	+80°C
Terminations	3 Pole Push Fit Terminal Block

Luminaire Output


Circuit Wattage	50W	58W	64W	70W
Typical Luminous Flux	5250lm	6090lm	6720lm	7350lm
Efficacy	105lm/W	105lm/W	105lm/W	105lm/W
Colour Temperature	4000K			
CRI	>80			
Beam Angle	120°			
Flicker Free	Yes			
LED Lifetime (L70)	50,000 Hours			

Microwave Information


Mounting Height	6M (Ceiling), 3M (Wall) (Recommended)
Detection Angle	200°
Detection Range	14M (Ceiling), 10M (Wall) (Max.)
Time Delay	5s / 90s / 5min. 15min. (DIP Switch Setting)
Daylight Threshold	50 Lux
HF System	5.8GHz ±75MHz
Master/Slave Facility	Up to 400W




50W



58W



64W

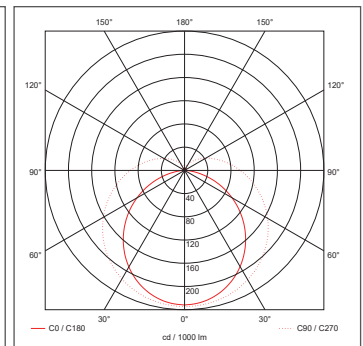

70W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com