INCEPTOR® EVO


Technical Specification

Product Code: OV9500WH93EM

12W LED Utility Bulkhead With Emergency - IP65 - 4200K - White Description:





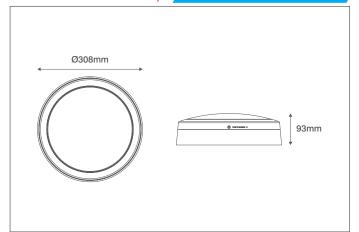

General Information


on	Supply & Power	
308mm Diameter x 93mm (D)	Input Voltage & Frequency	230V~ 50/60Hz
Base, Outer Ring, Circular Facia & Diffuser:	Electrical Safety	Class II (Double Insulated)
Polycarbonate (UV Stabilised)	LED Wattage	10W
Gear Tray, Driver Housing & Cable Grip:	Circuit Wattage	12W
Polycarbonate (UV Stabilised)	Input Current	107mA
LED Array: Aluminium Substrate	Ambient Temperature (Ta)	+5°C - +45°C
Moisture Seal: Silicone	LED Driver	Integrated
White (RAL 9010)	Prewired Flow [™] Connector	Yes (4 Pole CT203-F Screw Terminals)
1.48Kg		
282-286mm Diameter	Luminaire Output	
IP65	Colour Temperature	4200K
Tp(a)	CRI	68.4
IK08	Typical Luminous Flux	1210lm
Ceiling or Wall and Surface or Semi-recessed	Efficacy	101lm/W
5 Years (4 Years Battery)	Beam Angle	120°
	LED Lifetime (L70)	50,000 Hours
	08mm Diameter x 93mm (D) Base, Outer Ring, Circular Facia & Diffuser: Polycarbonate (UV Stabilised) Gear Tray, Driver Housing & Cable Grip: Polycarbonate (UV Stabilised) ED Array: Aluminium Substrate Moisture Seal: Silicone Vhite (RAL 9010) .48Kg P65 Tp(a) K08 Ceiling or Wall and Surface or Semi-recessed	B08mm Diameter x 93mm (D) Input Voltage & Frequency Base, Outer Ring, Circular Facia & Diffuser: Electrical Safety Polycarbonate (UV Stabilised) LED Wattage Baser Tray, Driver Housing & Cable Grip: Circuit Wattage Polycarbonate (UV Stabilised) Input Current Adoisture Seal: Silicone LED Driver Vhite (RAL 9010) Prewired Flow™ Connector .48Kg Luminaire Output P65 Colour Temperature (p(a) CRI K08 Typical Luminous Flux Ceiling or Wall and Surface or Semi-recessed Efficacy Years (4 Years Battery) Beam Angle

Accessories

OV9001BK/WH Circular Metal Housing For Inceptor $\ensuremath{\mathbb{R}}$ EVO - Black or White OV9002BK/WH Eyelid Metal Housing For Inceptor® EVO - Black or White Grille Metal Housing For Inceptor® EVO - Black or White OV9003BK/WH

Emergency Information

Installation Requirements	Can be wired as maintained or non-maintained	
Battery Specification	Ni-Cd 3000mAh 3.6V (Max Cell Temperature 50°C)	
Battery Warranty	4 Years	
Emergency Duration	3 Hours Minimum	





OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com

Page 1 of 1 Rev Errors & Omissions exclud Specification is subject to change without no